




Single 3G-SDI encoder which delivers HD or SD H.264 streams from an SDI video input over your existing network.

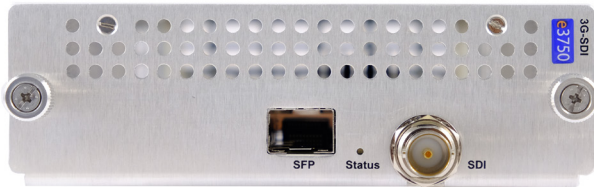

Interfaces

- BNC SDI interface supporting:
 - 3G SDI - SMPTE 424M – Level A only
 - HD SDI - SMPTE 292M
 - SDI - SMPTE 259M
 - 1.75V p-p 75Ω
- SFP interface supporting the following Embrionix SFP modules:
 - Optical SDI input (EB60LC2R-MN2-P)
 - Optical SDI output (EB60LC2T-MN2-13F)
 - HD-BNC SDI input (EB30HD2R-LN)
 - HD-BNC SDI output (EB30HD2T-LN)
 - DIN SDI input (EB30CS2R-LN)
 - ST2022-6 input (EB22LC2B-SN & emOPT-2D-2022-6)
- Embedded audio extracted from active video input (BNC or SFP), single audio pair from eight available
- Two 802.3 10/100/1000BaseT Ethernet (RJ-45 chassis sockets, dual Ethernet features for redundancy purposes require c1210 chassis)
- Serial RS232 Port for local administration (RJ-45 chassis socket)

Streaming

- Single program MPEG-2 transport streams (ISO/IEC 13818-1)
- UDP/RTP
- IP unicast
- IP multicast
- IGMP Join Group for enhanced switch compatibility
- Up to 200Mbps total stream output

Channel Management

- Channel announcement via SAP/SDP
- Up to 10 simultaneous stream destinations
- Multicast/unicast address selection (automatic/manual)
- Configurable name, number and group membership

Video Input

- Automatic detection of resolution and frame rate
- Resolutions supported:
 - 1080p 23.98Hz/24Hz/50Hz/59.94Hz/60Hz
 - 1080i 50Hz/59.94Hz/60Hz
 - 720p 50Hz/59.94Hz/60Hz
 - 480i/525i 59.94Hz & 576i/625i 50Hz
- HD 16:9 aspect ratio
- SD 16:9 aspect ratio

Video Encoding

- MPEG-4 part 10 H.264 (ISO/IEC 14496- 10) High Profile @ Level 4
- Video resolution: 525i, 525p, 625i, 625p, 720p, 1080i, 1080p
- Bit rate: 1Mbps – 20Mbps
- Frame rate: 23.98Hz/24Hz/50Hz/59.94Hz/60Hz
- Constant or variable bit rate

Audio Encoding

- MPEG-1 Layer II (ISO/IEC 11172-3)
- AAC
- Encoding bit rate 48kbps – 512kbps
- Audio sampling rate 48kHz

Management

- Fully integrated with all Exterity management tools:
 - Admin level management using AvediaServer Director and AvediaCare applications
 - HTTP/HTTPS device web interface; recommended browser: Chrome®
- SNMP
- SSDP device discovery
- RESTful API
- Serial RS232 Admin Port
- Event logging via Syslog (local and remote)
- Firmware upgrade via TFTP
- Configuration backup/restore via TFTP

Scaler

- Dedicated hardware scaler
- User-configurable up/down scaling
- User-configurable frame rate adjustment

Enhanced Features

- Test pattern generation
- Automatic streaming of fixed color/ test pattern on loss of video
- Watermarking (overlay customizable text or logo onto video)

Network

- Linux IPv4 stack
- DHCP or Static IP addressing
- IEEE 802.3u 10/100/1000Mbps MDIX Ethernet interface

System

- OS: Based on Linux 3.12

Protocols

IP (RFC 791), UDP (RFC 768), TCP (RFC 793), ARP (RFC 826), DNS (RFC 1035), DHCP (RFC 2131), ICMP (RFC 792), IGMP (RFC 3376), TFTP (RFC 1350), HTTP (RFC 2616), Syslog (RFC 3164), NTP (RFC 1305), SAP (RFC 2974), SDP (RFC 4566), RTP (RFC 3550), SNMP (v1, v2c -RFC 1901), IPv6 (RFC 8200), DHCPv6 (RFC 8415), SLAAC (RFC 4862), MLD (v2) (RFC 3810), NDP (RFC 4861)

Regulatory

CE:

- IEC 62368-1:2014
- EN62368-1:2014 + A11:2017
- EN55032:2012 + corrigenda Aug 2012 & Dec 2012
- EN55024:2010 + A1:2015
- EN 61000-3-2:2014
- EN 61000-3-3:2013

UL/CSA:

- UL62368-1:2019
- CSA C22.2 No. 62368-1:19

FCC:

- 47CFR:2011 Part 15, Sub Part B
- ANSI C63-4:2014

ACMA:

- AS/NZS 62368.1:2018

Physical Format

- Modular hot swap blade for Exterity chassis
- AvediaStream c1101 providing 1 inputs
- AvediaStream c1103 providing up to 3 inputs
- AvediaStream c1210 providing up to 10 inputs

Environment

- Operating: 0 ...+40°C / +32 ... +104°F
- Storage: -20 ...+70°C / -4 ... +158°F
- Operating and storage Relative Humidity: 10-90% (non-condensing)

Dimensions

- L: 275mm x W: 130mm x H: 40mm; weight 0.5kg

Power

- DC 24V: 14W typical, 20W maximum

MTBF

- Calculated to MIL-HDBK-217F, notice 2: 67783 hours (7.7 years)

In the Box

- AvediaStream e3750 encoder blade, single 3G SDI in, up to 1080p out
- Product Safety Brochure (hard copy)